

APart


SDQ-Series



MANUAL



SDQ5P

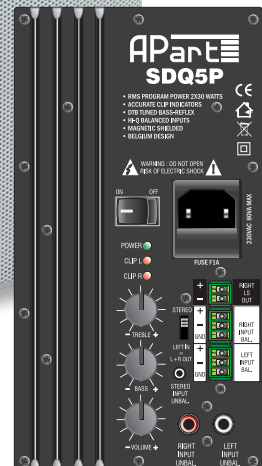


INFO@APART-AUDIO.COM



The APart SDQ5P powered loudspeaker set is a very compact, easy to use, plug and play sound system. It consists of one amplified loudspeaker with a 5.25" woofer, a quality high frequency unit and a second linkable passive loudspeaker.

The speakers are magnetically shielded, although some small radiation is inevitable.

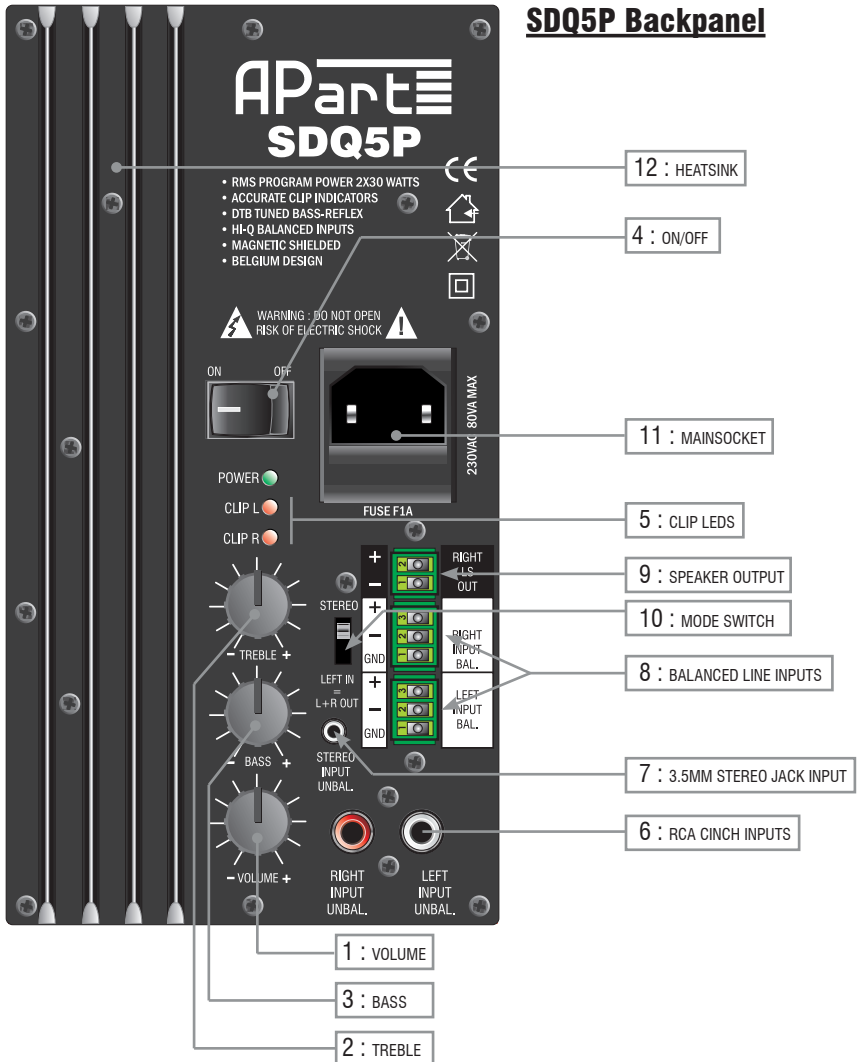



1. Volume control : With this button you can easily set the desired volume.
2. Treble control : Herewith you can add or decrease the high frequency. Adding high frequency can improve the intelligibility. Adjust it to the desired level. In the centre position the sound should be neutral.
3. Bass control : By adding bass you can add warmth to your music. Decreasing bass can improve the intelligibility of spoken messages, certainly in reverberant rooms.
4. On/Off : When the AC plug is connected to the mains circuit, you can turn the unit on or off with this button. When the unit is switched ON, the green led should illuminate.
5. Clip leds : Each channel has its clip led, indicating that max. power is reached. The system should be used without activating this red warning leds. Turn down the volume if these leds are flashing. When you neglect this warning, your system may get overheated or damaged.
6. RCA inputs : Here you can connect your sound source. These inputs have to be fed with a input signal at LINE level (cd, dvd, vhs, tuner, mixing table.....). Connecting a microphone will give bad result. In this case, you should use a microphone mixer or preamplifier. The left RCA plug (red) will feed the built in amplifier for the passive external loudspeaker. The right (white) plug will send your music to the amplified main unit.
7. 3, 5 mm stereo jack input : This line level stereo input is very useful to connect you computer, portable sources (CD, MD, MP3 players, ...).
8. Balanced line inputs : These three pin inputs can be used to feed the line level signals from devices with balanced outputs (Shield, hot, cold). Balanced wiring is recommended when the input lines are long or placed in a interference area. When hum appears when feeding the line input, it can be useful not to connect the shield at the SDQ5P side. These signals will be mixed with the signals fed into the rca and jack input, *meaning you can use all the inputs at the same time.*
9. Speaker output : These two pin euroblock plug should be used to feed the shipped passive loudspeaker. Using other loudspeakers can give bad result and even cause damage to the main SDQ unit. Be sure the "+" socket of the main unit is connected to the "+" of the passive loudspeaker and the "-" to "-".
10. Mode switch : This switch turns your SDQ5P in a full stereo or a very compact full option mono system. When switched to the mono mode, you should only use the "Left" inputs. From this input left and right amplifier will be fed.
11. Mains socket : The unit can be branched to the mains circuit by a standard IEC type power cord. This socket contains a 1 A slow blow fuse. Use a screw driver to flip out the fuse compartment and to replace the fuse. When this fuse blows frequently you should bring the SDQ to a qualified service centre. First check whether you didn't use a quick-blow fuse. To avoid ground loops, certainly when using audio signals from computers, this socket doesn't contain a ground pin!
12. Heat sink : When using your SDQ5P at full power and for a long time, this heat sink might become very hot, do not touch ! Take care when placing it to close to other items sensitive to heat.



We are sure your SDQ5P will be your regular companion for many applications.

Features

- Ideal for monitor, Audio-Video applications
- Powerfull HiFi 5.25" woofer and 1" tweeter
- Brackets + 3 meter power cord included
- 2 x 30 watts RMS program, 200 Watts PMPO dynamic
- Enhanced bass response by DTB reflex tuning
- Accurate clip indicators
- Hi-Q balanced inputs
- Stereo inputs RCA ñ mini stereo jack (PC, MP3 players)
- Magnetically shielded
- Stylish design, suited for placement in corners
- Very good efficiency, high output

Specifications

Inputs

RCA stereo mini jack : 500 mV, 22 Kohm

Balanced Euroblock : 500 mV, 22K ohm

Tone control

Bass : +/- 12 dB at 80 Hz

Treble : +/- 12 dB at 12 KHz

System performance

2 x 30 watts RMS in 4 ohms

200 Watts dynamic PMPO

frequency range : 45 Hz - 20.000 Hz

THD : < 0.07 %

S/N ratio : > -90 dB

Any suggestions ?

They are well appreciated and eventually rewarded!

Send your ideas or suggestions to

suggestions@apart-audio.com

SDQ5P is developed by

Audioprof nv
Lanteernhofstraat 90
BE-2100 Deurne
BELGIUM

