


EVOLVE 30M G2 Portable column system

- Consistent audience coverage with ultra-wide 120° horizontal and 40° vertical array-formed coverage
- Fast 3-2-1 setup with lightweight, easy-to-carry design and ergonomic handles
- Mix your show easily via the QuickSmart App or onboard controls with a larger color LCD
- Enhanced flexibility with switchable 48V phantom power, feedback suppression, and expanded FX options
- Expand mixer inputs using QuickSmart Link to share audio and control between two EVOLVE 30M G2 portable column systems



EVOLVE 30M G2 is the new generation of the EVOLVE Column Loudspeaker system family. While keeping the EVOLVE's ease of assembly, EVOLVE 30M G2 improves the peak output of the previous generation and enhances the portability of the system, catering to the evolving needs of professional users including DJs, bands, production companies, event organizers, and venues.

EVOLVE 30M G2 delivers up to 2 dB higher maximum SPL and provides upgraded DSP features, such as QuickSmart Link, AFS, music ducking, increased FX combination possibilities, and switchable 48V phantom power. All features are controllable via a large 2.8-inch color LCD screen.

EVOLVE 30M G2 features a 10-inch subwoofer, designed to provide deep bass and optimum sound quality for events with up to 150 attendees. The subwoofer laminar flow vent design enhances the low-frequency output and efficiency. The portability of the system is also improved by adding a new top handle.

EVOLVE 30M G2 is integrated into the QuickSmart Mobile App ecosystem, which allows the user to control it as part of a system with other Bluetooth-enabled Electro-Voice portable speakers.

EVOLVE 30M G2 features industry standard connectors for microphones and line-level signals, including XLR/TRS combo jacks, stereo RCA/3.5-mm line input, footswitch FX control, and Bluetooth® true wireless stereo (TWS) streaming.

Available in black or white finishes, EVOLVE 30M G2 includes a carrying bag for the column and pole. The system also offers a padded soft cover or a rolling carrying case for the subwoofer, sold separately.

Technical specifications

Column	(6) 2.8-inch neodymium drivers
Subwoofer	(1) 10-inch woofer
Frequency response (-3 dB) (Hz) ¹	51 Hz – 20,000 Hz
Frequency range (-10 dB) (Hz) ¹	45 Hz – 20,000 Hz
Maximum sound pressure level at a distance of 1 m (dB) ²	125 dB
Coverage angle HxV (°)	120° x 40°
Amplifier rating (W)	1500 W
Power consumption (V, Hz, A) ³	100 - 240 VAC, 50 - 60 Hz, 1.0 - 0.5 A
LF channel rating (W)	750 W
HF channel rating (W)	750 W
Crossover frequency (Hz)	200 Hz
Connector type	(4) XLR/TRS combo jack mic / line inputs with switchable 48V phantom power ¼-inch Hi-Z input XLR/TRS combo jack stereo line input Stereo RCA line input 3.5 mm stereo jack input XLR Mix out XLR Aux out RJ45 QuickSmart Link connector Bluetooth Stereo input with TWS ¼-inch footswitch control jack input

Enclosure	Plywood with polyurea coating (subwoofer) Composite (column) Aluminum (pole)
Grille material	Steel with black or white powder coat
Color	Black or white
Dimensions (H x W x D) (in)	16.73 in x 13.07 in x 17 in (subwoofer) 24.41 in x 3.74 in x 6.21 in (column) 23.64 in x 1.91 in x 2.17 in (each pole half)
Dimensions (H x W x D) (mm)	424.85 mm x 332 mm x 432 mm (subwoofer) 620 mm x 95 mm x 157.7 mm (column) 600.5 mm x 48.5 mm x 55 mm (each pole half)
Assembled dimensions (H x W x D) (in)	78.54 in x 13.07 in x 17.01 in
Assembled dimensions (H x W x D) (mm)	1995 mm x 332 mm x 432 mm
Shipping dimensions (H x W x D) (in)	27.63 in x 15.55 in x 23.43 in
Shipping dimensions (H x W x D) (mm)	702 mm x 395 mm x 595 mm
Weight (lb)	43.54 lb (assembled system) 34.6 lb (subwoofer) 5.6 lb (column) 3 lb (each pole half)
Weight (kg)	19.75 kg (assembled system) 15.7 kg (subwoofer) 2.7 kg (column) 1.4 kg (each pole half)
Shipping weight (lb)	54.34 lb
Shipping weight (kg)	24.65 kg

¹Full-space measurement using **MUSIC** DSP preset.


²Maximum SPL is measured at 1 m using broadband pink noise at maximum output.

³Current rating is 1/8 power.


Amplifier panel



Frequency response

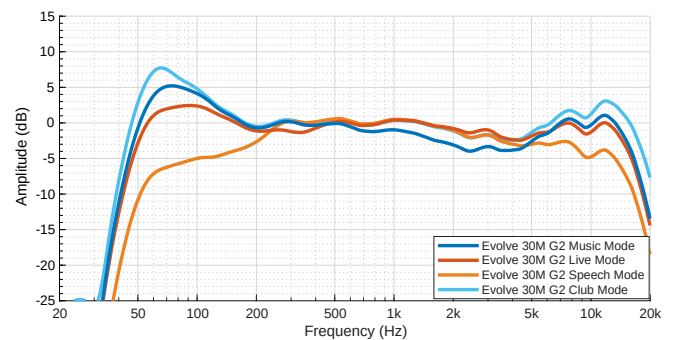

Dimensions

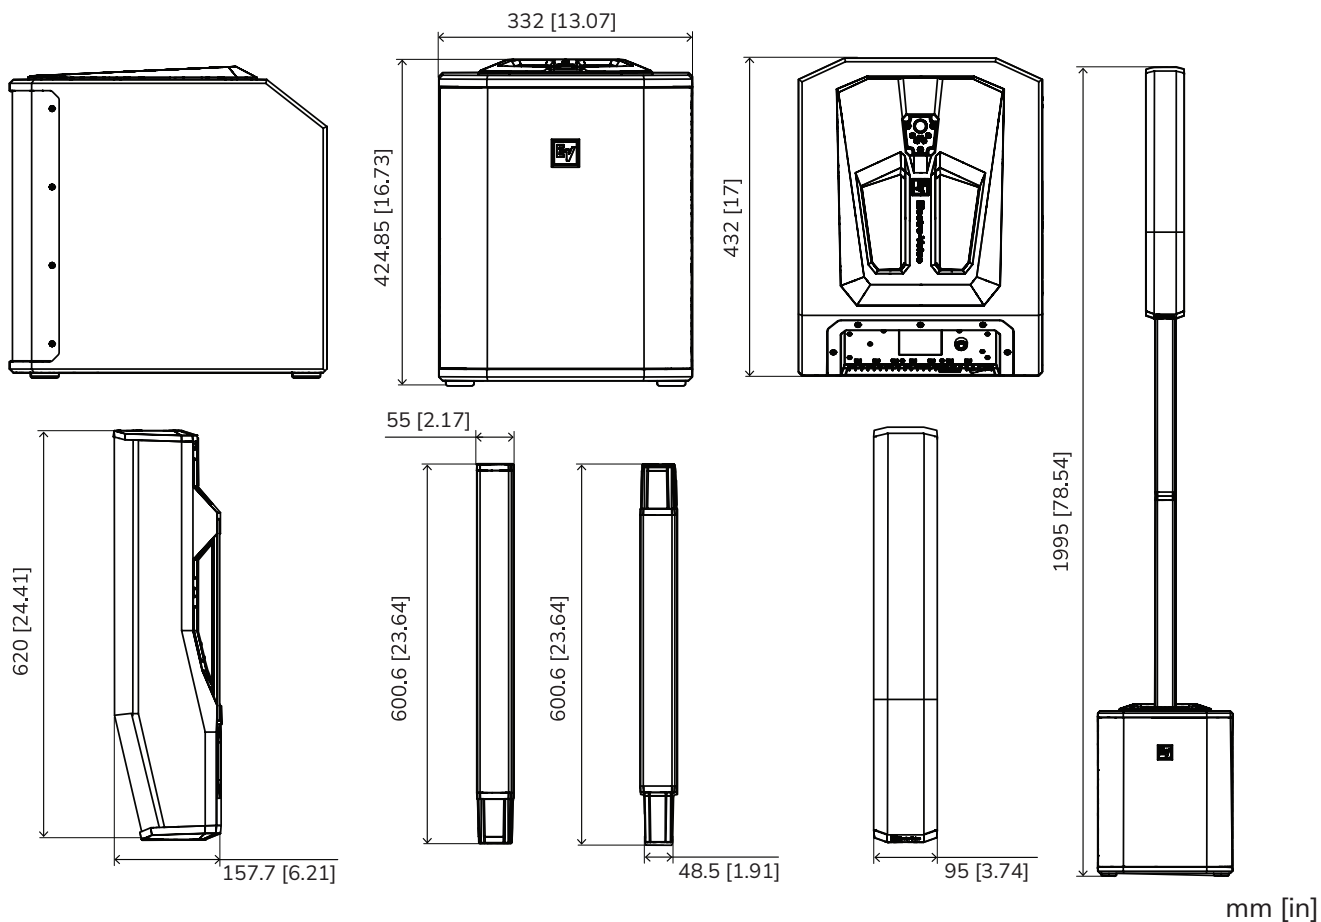

Ordering information

EVOLVE30M-G2-EU Portable column system black EU 30M G2

Column speaker, sub pole and 10-inch subwoofer, Europe cord, black

Order number **EVOLVE30M-G2-EU | Z.01X.002.622**

EVOLVE30M-G2-US Portable column system black US 30M G2

Column speaker, sub pole and 10-inch subwoofer, United States cord, black

Order number **EVOLVE30M-G2-US | Z.01X.002.621**

EVOLVE30M-G2-W Portable column system white US&EU 30MG2

Column speaker, sub pole and 10-inch subwoofer, Europe and United States cord, white

Order number **EVOLVE30M-G2-W | Z.01X.002.623**

Accessories

EVOLVE30M-CVR-G2 Soft cover EVOLVE30M sub G2

Cover for the EVOLVE 30M G2 subwoofer, black

Order number **EVOLVE30M-CVR-G2 | Z.01X.007.267**

EVOLVE30M-CASE Carrying case for EVOLVE 30M

Column speaker carrying case with wheels, black

Order number **EVOLVE30M-CASE | F.01U.366.325**

EVOLVE50-PL-SB Column speaker pole, short, black

Column speaker short pole, black

Order number **EVOLVE50-PL-SB | F.01U.335.108**

EVOLVE50-PL-SW Column speaker pole, short, white

Column speaker short pole, white

Order number **EVOLVE50-PL-SW | F.01U.335.109**



<https://www.electrovoice.com>