



Type(s)

Project

Date

Notes

GENERAL INFORMATION

MegaPix brings next-level performance to the pixel wash fixture. With a patented Integrated Fresnel Lens (IFL) System, these fixtures deliver the classically beautiful output characteristics of a Fresnel lens. Create a wide range of elegant stage washes with advanced RGBL color mixing, smooth dimming, and a 2,000–10,000 K CT channel. On top of all that, a robust Pixel, Macro, and Flex Effects system provides unique face looks and plenty of splash. Weather-rated with an IP54 rating, MegaPix is protected from dust and rain, whether used inside the theatre or outside on a festival stage.

Applications

- Theatre
- Live concerts
- Tradeshows
- Festivals
- Industrial shows
- Award shows
- Studios
- Corporate events

Product Features

- Additive LED, RGBL, color mixing system for powerful saturated colors and tunable white control
- Exceeds 10,000 Lumens
- Patented Integrated Fresnel Lens system and HaloGraphic Pixel Definition
- Soft field with 4.5°–50° zoom
- CT Channel achieves the top tier TM30 color rendering Preference 1 (P1) guidelines from 2,200–10,000 K and P2 from 2,000–2,200 K.
- FleX Effects Generator for easily customizable macros
- Six cell pixel mapping
- Modular control with Art-Net or sACN in addition to simultaneous DMX control
- Weather rated for temporary use outdoors against rain and dust (IP 54)
- HazeFree™ protected lenses for improved efficiency, longevity, and visual impact

ORDERING INFORMATION

Model	Description
MP-MI	MegaPix, Black, with Molded Insert, Boxed
RC-MP	Roadcase for MegaPix, (fits up to six [6] MegaPix)

Color Options: Fixtures ship standard in black. White available by request.
Included Accessories: Fixture includes two (2) 107 mm single-hole Omega brackets, one (1) fixture power cord - bare ends to powerCON® TRUE1® compatible connector, and a safety cable.

Accessories

Model	Description
MP-TH	Top Hat, Snoot for MegaPix
MV-MOUNT	Multiverse Mounting Kit
CT-5914	Multiverse Connect Module, 2.4 GHz



PRODUCT SPECIFICATIONS

Source

Engine	Custom RGBL LED
LED Details	Six (6) 60 W LED engines
Field Lumens	See photometrics on page 4
Max Integrating Sphere Lumens	10,000
LPW	28
LED Life	50,000 hours

Color

Color Mixing	Additive RGBL color mixing
Color Temperature	2000 K to 10000 K TM-30 Preference 1

Optical

Angle Range	4.5°–50°
Aperture Size	146 mm
Diffusion	Soft and homogenized field of light throughout entire zoom range
Flicker Control/Hz Range	2.4 kHz, 16 kHz, and 25 kHz

Control

Input Method	DMX (5-pin) or Ethernet
Protocols	DMX via RS-485 Art-Net or sACN via Ethernet
Ethernet Pass-Thru	No
Modes (Footprint)	Wash (15) Base (25), Base+Flex (45), and separately addressable Pixel Control Module (24)
RDM Functions	Yes
UI Type	Full-color graphical UI 5-button navigational control NFC configuration
Local Control	Yes
Dimming Performance	16-bit, DMX controlled
Wireless	Multiverse via optional MV-Mount Adaptor and Multiverse Connect Module (CT-5914)

Notes: All LED sources experience some lessening of light output and some color shift over time. LED output will vary with thermal conditions. Thermal conditions can be affected by ambient temperatures and orientation.

Electrical

Voltage Range	100–240 V 50–60 Hz
Input Method	REAN® power X Series Connector
Wattage	450 W
Current (Max)	4.5 A @ 100 V 1.8 A @ 240 V
Inrush (First Half Cycle)	120 V: 47.6 A 230 V: 59.2 A
Fixtures per Circuit	4 fixtures (R20 module or similar) Note: REAN power X Series connector rated for 20 A (120 V/60 Hz) and 16 A (240 V/50 Hz)

Thermal

Ambient Operating Temp	-10°C to 40°C (14°F to 104°F)
Fan Mode	Auto, Studio, Linear fan control
Stationary Noise	Standard - 36.9 dBA Studio - 36.6 dBA Lowest settable fan setting - 31.6 dBA All tests at 18.6 dBA background noise

Physical

Pan and Tilt Range	540° pan, 264° tilt
Max Pan/Tilt Speed	360° in 1.07 s/180° in 0.87 s
Materials	Steel and aluminum frame with molded plastic covers and protected rubber bellows
Color Options	Black, white by request
Mounting Options	Any orientation
IP Rating	IP54
Weight	9.2 kg (20.3 lb)
Included Accessories	X Series IP65 to bare end fixture tail Two (2) 107 mm single-hole Omega brackets Safety cable

Warranty

Warranty Details	etcconnect.com/Support/Warranty.aspx
------------------	--

Regulatory & Compliance

Approved regulatory standards	cETLus Listed Listed to UL 1573 Certified to CSA STD. C22.2 No: 166 CB Certified CE Compliant UKCA Compliant
Complies to the ROHS directive	Yes

Safety

Safety	Minimum distance to illuminated surface = 0.5 m (1.6 ft) Minimum distance from fixture head to combustible materials = 0.1 m (4.0 in)
--------	--

PHOTOMETRIC DATA

MegaPix - All On, Auto Fan Mode

	Degree	Candela	Field Lumens	Power Usage	Lumens Per Watt
Narrow Beam	4.5°	640,300	4,193	360 W	12
Medium Field	26°	105,100	7,706	360 W	21
Wide Field	50°	30,100	10,025	360 W	28

Narrow Beam- 4.5°

Throw Distance	10 ft 3.0 m	20 ft 6.1 m	30 ft 9.1 m	50 ft 15.2 m	200 ft 61 m
Field Diameter	0.8 ft 0.25 m	1.6 ft 0.49 m	2.4 ft 0.74 m	3.9 ft 1.19 m	15.7 ft 4.79 m
Illuminance (fc)	6,403	1,601	712	257	17
Illuminance (lux)	68,890	17,222	7,654	2,756	172

Medium Field - 26°

Throw Distance	10 ft 3.0 m	20 ft 6.1 m	30 ft 9.1 m	50 ft 15.2 m	200 ft 61 m
Field Diameter	4.6 ft 1.41 m	9.2 ft 2.81 m	13.9 ft 4.24 m	23.1 ft 7.05 m	92.3 ft 28.14 m
Illuminance (fc)	1,051	263	117	43	3
Illuminance (lux)	11,302	2,826	1,256	452	28


Wide Field- 50°

Throw Distance	10 ft 3.0 m	20 ft 6.1 m	30 ft 9.1 m	50 ft 15.2 m	200 ft 61 m
Field Diameter	9.3 ft 2.84 m	18.7 ft 5.7 m	28 ft 8.54 m	46.6 ft 14.21 m	186.5 ft 56.85 m
Illuminance (fc)	301	76	34	13	1
Illuminance (lux)	3,229	807	359	129	8

To determine center beam illumination in footcandles at any throw distance, divide candela by the throw distance squared.

Metric conversions: For meters, multiply feet by 0.3048.
For lux, multiply footcandles by 10.76.



MegaPix - 3200 K

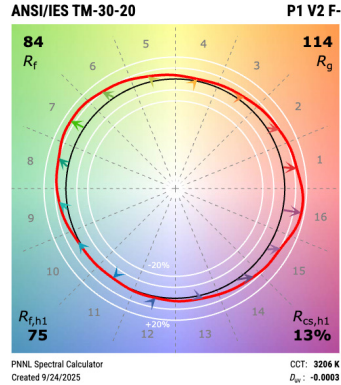


Additional Color Metrics

CRI R_a (R_g) 75 (-15)

TLCI 74





MegaPix - 4500 K

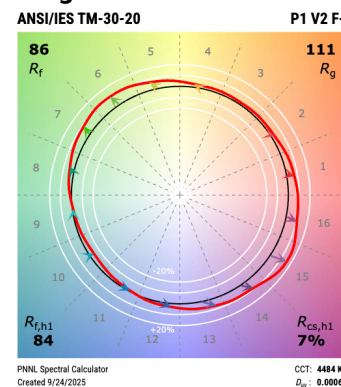


Additional Color Metrics

CRI R_a (R_g) 84 (31)

TLCI 84





MegaPix - 5600 K

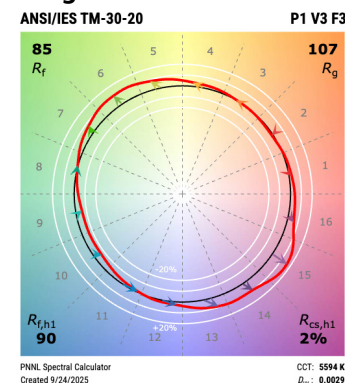

Additional Color Metrics

CRI R_a (R_g) 85 (74)


TLCI 86



Product Dimensions

Model	Height		Width		Depth		Weight	
	in	mm	in	mm	in	mm	lb	kg
MegaPix**	15.8	401	11.5	293	8.9	226	20.3	9.2
MegaPix in Box with Foam Insert	21.0	533	16.0	406	11.0	280	32.3	14.65

**Does not include mounting hardware

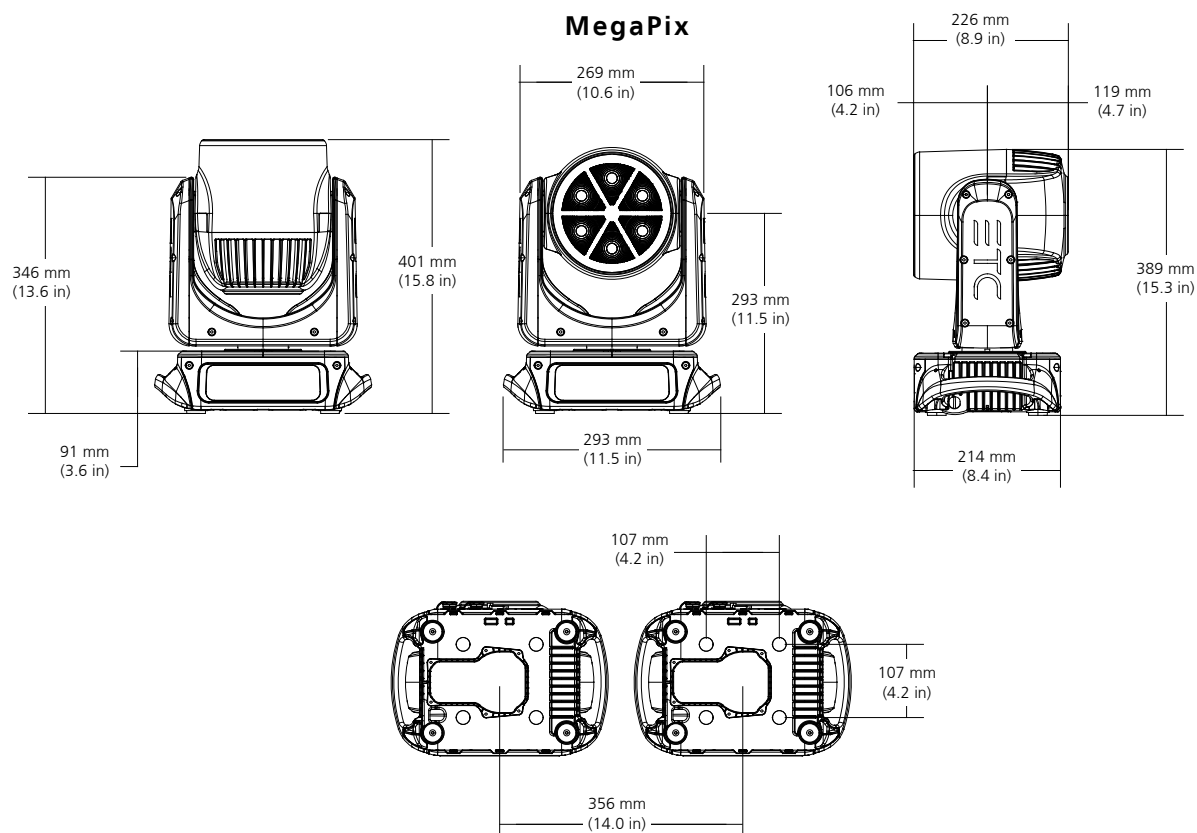

Power Table


VAC	Amps	Hz	Watts	VA	PF
100	4.5	50	448	454	0.98
120	3.8	60	447	453	0.98
200	2.2	50	426	433	0.97
208	2.1	60	422	433	0.97
220	2.0	50	418	432	0.96
230	1.9	50	417	433	0.96
240	1.8	60	416	436	0.95

ADDITIONAL ORDERING INFORMATION




Additional Accessories

Model Number	Description
OB107-1	Omega bracket, 107 mm single-hole (included)
OB107-3	Omega bracket, 107 mm three-hole
T1PA-A	Fixture Power Cord Upgrade, 5 ft TRUE1 TOP to Parallel Blade U-Ground (Edison)
T1PA-SP	Fixture Power Cord Upgrade, Stage Pin to powerCON TRUE1 TOP, 20 A
T1PA-L620	Fixture Power Cord Upgrade, L6-20 to powerCON TRUE1 TOP, 20 A
T1PA-L520	Fixture Power Cord Upgrade, L5-20 to powerCON TRUE1 TOP, 20 A
MEGA-CLW	MegaClaw™
HALF-COU	Half-Coupler, 2" Alloy, Truss Clamp
MINI-CLW	Mini-Claw™

Molded Case Insert Dimensions

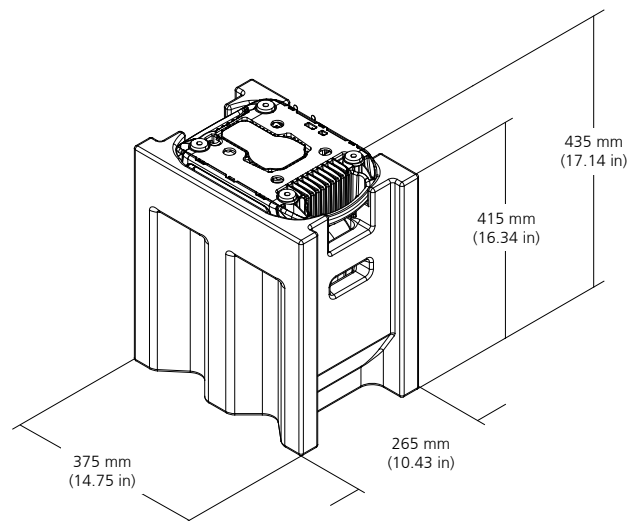

Optional Roadcase Dimensions

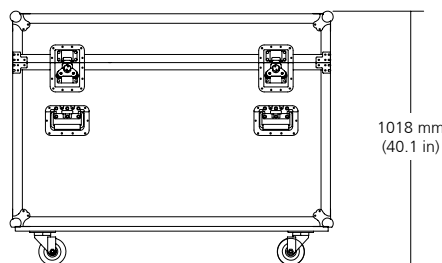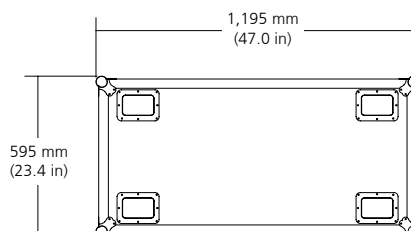

Case Weight:
68 kg (150 lb)

Does not include fixtures or molded inserts



Corporate Headquarters • Middleton, WI USA

Global Offices • London, UK • Rome, IT • Holzkirchen, DE • Paris, FR • Hong Kong • Dubai, UAE
New York, NY • Orlando, FL • Los Angeles, CA • Austin, TX • Squamish, BC • Victor, NY

©2026 ETC. All Rights Reserved. All product information and specifications subject to change. Rev D 2026-05

*Trademark and patent info: etconnect.com/IP • Third-party license agreement info: etconnect.com/licenses

etconnect.com