



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER



Description NXL 14-A is the most compact active speaker in the professional NXL series. It features two 6" woofers in a symmetrical configuration and the new 1.75" Precision Transducers PKX driver loaded on a rotatable TRW waveguide, all powered by a 2,100W two-channel amplifier. Available in black or white finish, the NXL 14-A is designed to deliver definition, power, and portability in any live application. Perfect for vocal reproduction, ideal in compact live systems paired with SUB Series subwoofers, in immersive setups, or as a fill speaker.

- Features**
- › 128 dB max SPL
 - › 2100W Class-D Bi-Amplification
 - › 70-20000 Hz linear frequency range
 - › 1.75" PKX / Neodymium Compression Driver
 - › 2 x 6" High Power Neodymium Woofers
 - › Rotatable 100° x 70° TRW Waveguide
 - › FIRPHASE and Bass Motion Control


Part Number	13000888	NXL 14-A	220-240 V	Black - RAL 9005	EAN 8024530022006
	13000891	NXL 14-A W	220-240 V	White - RAL 9003	EAN 8024530022013
	13000892	NXL 14-A	100-120 V	Black - RAL 9005	EAN 8024530022204
	13000893	NXL 14-A W	100-120 V	White - RAL 9003	EAN 8024530022211



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

Line Art 2D

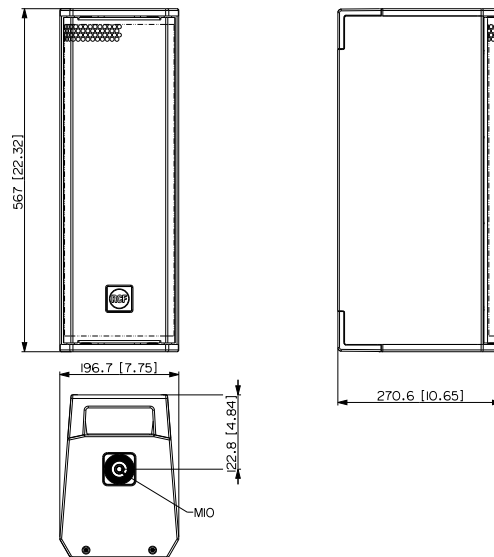

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	70 Hz ÷ 20000 Hz
	Max SPL @ 1m	128 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.0" neo, 1.75" v.c
	Woofer	2 x 6.0" neo, 2.0" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1200
	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Linear/Boost/Stage Presets, Volume.
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plywood
	Hardware	2X M10 TOP AND BOTTOM
		2X PIN D.10
	Handles	2 TOP AND BOTTOM
	Pole mount/Cap	Quick-fit socket
	Grille	Steel
	Color	Black - RAL 9005, White - RAL 9003



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

Size / Weight	Height	567 mm / 22.32 inches		
	Width	197 mm / 7.76 inches		
	Depth	270 mm / 10.63 inches		
	Weight	12.8 kg / 28.22 lbs		
Rigging / Mounting	ACCESSORIES			
	FLOOR STANDS			
	13360109 AC PRO-FS	Black	EAN 8024530006471	
	HORIZONTAL BRACKETS			
	13360683 HBR60683	Black	EAN 8024530022518	
	13360684 HBR60684	White	EAN 8024530022525	
	13360681 VBR60681	Black	EAN 8024530022532	
	13360682 VBR60682	White	EAN 8024530022549	
	POLE MOUNT KITS			
	13360232 AC PMX		EAN 8024530010058	
	13360110 AC PRO-PM	Black	EAN 8024530006488	
	13360678 PMK60678	Black	EAN 8024530022563	
	13360679 PMK60679	White	EAN 8024530022570	
	13360638 PM-KIT M20	White	EAN 8024530022303	
	13360067 PM-KIT M20	Black	EAN 8024530014599	
	Protections	BAGS		
		13360685 CVR60685	Black	EAN 8024530022556
Cables	RAIN PROTECTIONS			
	13360700 RPR60700	Black - RAL 9005	EAN 8024530023072	
	CABLES KIT			
	13360102 AC XLR 3M3F		EAN 8024530006402	