



ART 932-A

PROFESSIONAL ACTIVE SPEAKER



Description

ART 932-A is masterfully engineered to deliver stellar audio performance and versatility for intensive audio applications.

The combination of a 3" titanium/neodymium compression driver, 12" woofer - two-channel 2100W amplifier, and the constant directivity True Resistive Waveguide produces coherent 100° x 60° coverage for the listening area with up to 132 dB SPL, distortion-free sound.

Merging RCF proprietary FIRPHASE and Bass Motion Control DSP processing, perfectly tuned for each model, the audience will experience absolute clarity and deep, powerful bass response.

The sleek cabinet uses a special polypropylene composite material with an M-brace internal reinforcement, making it easy to carry and secure to install on a pole, flown-, wall-, or truss-mounted using the multiple rigging points available.

Features

- › Up to 132 dB Sound Pressure Level
- › 2100W Class-D Bi-Amplification
- › 50-20000 Hz linear frequency response
- › 3" Titanium/Neodymium Compression Driver
- › 12" Woofer
- › FIRPHASE zero degrees phase technology
- › Bass Motion Control
woofer excursion management

Part Number


13000680 ART 932-A	220-240 V	Black	EAN 8024530019112
13000681 ART 932-A	115 V	Black	EAN 8024530019266



ART 932-A

PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

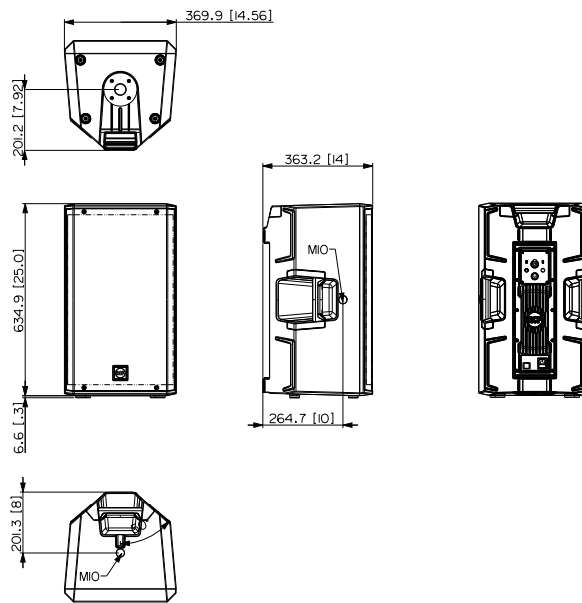

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz - 20000 Hz
	Max SPL @ 1m	132 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	60°
Transducers	Compression Driver	1 x 1.4" neo, 3.0" v.c
	Woofer	1 x 12", 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	700Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Linear, Boost, Stage, Volume
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	VDE
	Standard compliance	Safety agency



ART 932-A

PROFESSIONAL ACTIVE SPEAKER

Physical specifications	Cabinet/Case Material	PP Composite			
	Hardware	1 x M10 Top, 1 x M10 each side			
	Handles	1 Top , 1 each side			
	Pole mount/Cap	35 mm insert			
	Grille	Steel			
	Color	Black			
Size / Weight	Height	642 mm / 25.28 inches			
	Width	370 mm / 14.57 inches			
	Depth	363 mm / 14.29 inches			
	Weight	19 kg / 41.89 lbs			
Rigging / Mounting	ACCESSORIES				
	FLOOR STANDS				
	13360109	AC PRO-FS	Black	EAN 8024530006471	
	FLYING BRACKETS				
	13360477	FL-BR ART 912	Black	EAN 8024530019204	
	HORIZONTAL BRACKETS				
	13360475	H-BR ART 912	Black	EAN 8024530019228	
	POLE MOUNT KITS				
	13360232	AC PMX		EAN 8024530010058	
	13360110	AC PRO-PM	Black	EAN 8024530006488	
	13360067	PM-KIT M20	Black	EAN 8024530014599	
	VERTICAL BRACKETS				
	13360476	V-BR ART 912	Black	EAN 8024530019211	
	Protections	COVERS			
		13360474	CVR 040	Black	EAN 8024530018849
	Cables	CABLES KIT			
13360102		AC XLR 3M3F		EAN 8024530006402	