



DM 61

TWO-WAY COMPACT SPEAKER



Description DM 61 is a compact two way speaker designed for constant voltage systems. The speaker provide natural, smooth sound reproduction ideal for use in business music systems and indoor/outdoor background music applications. Connections to the loudspeaker line are made by using the two wire cable coming out from the loudspeaker rear side. The enclosure includes a protective perforated grille and an accessory for the wall mounting.

- Features**
- › 6" woofer with 1" dome tweeter
 - › Power selectable (100 V): 25 W – 12.5 W – 7.5 W – 5 W – 2.5 W
 - › 89 dB sensitivity
 - › Colour white RAL 9002
 - › Plastic body UL 94 V0, steel grille
 - › Protection grade IP 55

Part Number 13000050 DM 61


White - RAL 9002 EAN 8024530004958



DM 61

TWO-WAY COMPACT SPEAKER

Line Art 2D

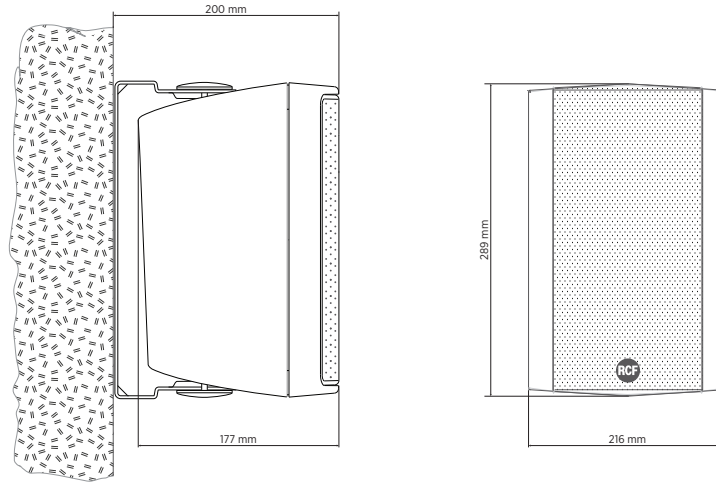

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	70 Hz - 20000 Hz
	Max SPL @ 1m	106 dB
	Horizontal coverage angle	120°
	Vertical coverage angle	140°
	System Sensitivity	89 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	25 W
	Peak Power Handling	100 W PEAK
	Crossover Frequencies	6000 Hz
Transducers	Dome Tweeter	1 x 1.0"
	Woofers	1 x 6.0"
Input/Output section	Input connectors	Cable
	Output connectors	Cable
	Constant Voltage Transformer	100 V
	Power selection 1	25 W - 400 ohm
	Power selection 2	12.5 W - 800 ohm
	Power selection 3	7.5 W - 1333 ohm
Standard compliance	Power selection 4	5 W - 2000 ohm
	Power selection 5	2.5 W - 4000 ohm
	IP protection grade	IP 55
	Safety agency	CE compliant



DM 61

TWO-WAY COMPACT SPEAKER

Physical specifications	Cabinet/Case Material	Plastic
	Hardware	Aluminium U bracket
	Grille	Aluminium
	Color	White - RAL 9002
Size / Weight	Height	289 mm / 11.38 inches
	Width	216 mm / 8.5 inches
	Depth	177 mm / 6.97 inches
	Weight	3.98 kg / 8.77 lbs