



NX 910-A

PROFESSIONAL ACTIVE SPEAKER



Description NX 910-A is masterfully engineered from the ground up to deliver stellar audio performance for solo musicians, bands, and DJs. The combination of 1.75" compression driver, 10" woofer, two-channel 2100W amplifier, and a constant directivity waveguide produces coherent 100° x 60° coverage for the listening area with up to 130 dB SPL of distortion-free sound. Used as a stand-alone speaker for a FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 910-A blends high-performance and reliability in a compact package. Blending RCF proprietary FIRPHASE and Bass Motion Control DSP processing, NX 9 Series speakers are perfectly tuned for each model, delivering absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.

- Features**
- › Up to 130 dB Sound Pressure Level
 - › 2100W Class-D Bi-Amplification
 - › 50-20000 Hz linear frequency response
 - › 1.75" Compression Driver
 - › 10" Woofer
 - › FIRPHASE zero degrees phase technology
 - › Bass Motion Control
 - › woofer excursion management


Part Number	13000668 NX 910-A	220-240 V	Black	EAN 8024530019020
	13000688 NX 910-A	115 V	Black	EAN 8024530019037



NX 910-A

PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

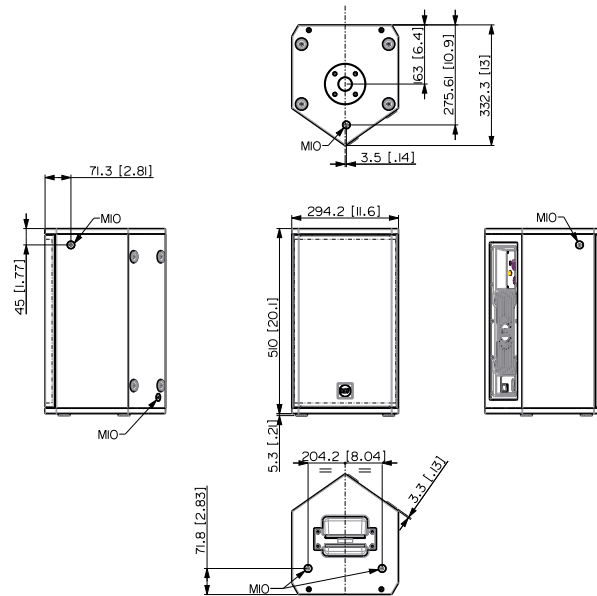

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz - 20000 Hz
	Max SPL @ 1m	130 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	60°
Transducers	Compression Driver	1 x 1.0", 1.75" v.c
	Woofer	1 x 10", 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1600 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Linear, Boost, Stage, Volume
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	VDE
Standard compliance	Safety agency	CE compliant



NX 910-A

PROFESSIONAL ACTIVE SPEAKER

Physical specifications	Cabinet/Case Material	Plywood			
	Hardware	2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear			
	Handles	1 Top			
	Pole mount/Cap	35 mm insert			
	Grille	Steel			
	Color	Black			
	Size / Weight	Height	510 mm / 20.08 inches		
		Width	295 mm / 11.61 inches		
		Depth	333 mm / 13.11 inches		
		Weight	16.4 kg / 36.16 lbs		
Rigging / Mounting	ACCESSORIES				
	FLOOR STANDS				
	13360109	AC PRO-FS	Black	EAN 8024530006471	
	FLYING BRACKETS				
	13360031	AC EB 4X		EAN 8024530018870	
	HORIZONTAL BRACKETS				
	13360506	2X PLATE H-BR NX 910-912-915	Black	EAN 8024530020057	
	13360551	H-BR 007	Black - RAL 9005	EAN 8024530021641	
	13360702	PLT60702	Black	EAN 8024530023089	
	POLE MOUNT KITS				
	13360232	AC PMX		EAN 8024530010058	
	13360110	AC PRO-PM	Black	EAN 8024530006488	
	13360067	PM-KIT M20	Black	EAN 8024530014599	
	WALL MOUNT BRACKETS				
	13360539	WM-BR 001	Black - RAL 9005	EAN 8024530021344	
	Protections	BAGS, COVERS			
		13360495	CVR NX 910	Black	EAN 8024530019488
Cables	CABLES KIT				
	13360102	AC XLR 3M3F		EAN 8024530006402	