



# NX 915-SMA

PROFESSIONAL ACTIVE STAGE MONITOR



**Description** NX 915-SMA speaker is a stage monitor designed for sound providers, musicians, bands, and DJs. The combination of a 1.75" compression driver, 15" woofer, two-channel 2,100W amplifier, and the TRW waveguide produces coherent 100° x 70° coverage for the listening area with up to 131dB SPL of distortion-free sound. Used as a stage monitor, stand-alone speaker system, or satellite paired with a subwoofer, the NX 915-SMA blends high performance and reliability in a compact package. Combining RCF proprietary FIRPHASE and Bass Motion Control DSP processing, NX 915-SMA Series speakers deliver absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and set up on stage or on a pole.

- Features**
- › Up to 131 dB Sound Pressure Level
  - › 2100W Class-D bi-amplification
  - › 45-20000 Hz linear frequency response
  - › 1.75" Compression Driver
  - › 15" Woofer
  - › FIRPHASE zero degrees phase technology
  - › Bass Motion Control woofer excursion management
  - › 70°x100° Constant Directivity Coverage Angle
  - › Perfectly tailored for horizontal or vertical deployment


<b>Part Number</b>	13000785 NX 915-SMA	220-240 V	Black	EAN 8024530020552
	13000786 NX 915-SMA	100-120 V	Black	EAN 8024530020583



# NX 915-SMA

PROFESSIONAL ACTIVE STAGE MONITOR

Line Art 2D

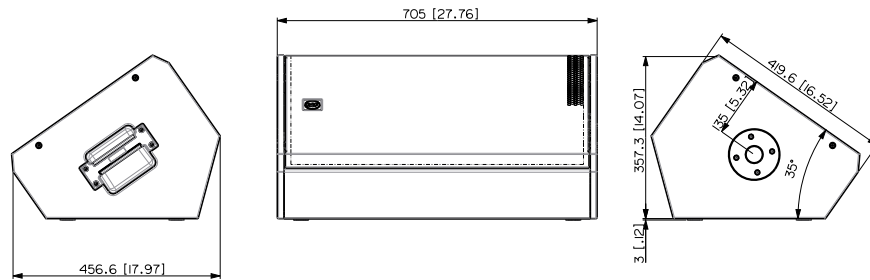

## TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	45 Hz - 20000 Hz
	Max SPL @ 1m	131 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
<b>Transducers</b>	Compression Driver	1 x 1.0", 1.75" v.c
	Woofer	1 x 15", 2.5" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
<b>Processor section</b>	Crossover Frequencies	1600 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
<b>Power section</b>	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
<b>Standard compliance</b>	Safety agency	CE compliant



# NX 915-SMA

## PROFESSIONAL ACTIVE STAGE MONITOR

Physical specifications	Cabinet/Case Material	Plywood			
	Handles	1 on side and 1 on top			
	Pole mount/Cap	35 mm insert			
	Grille	Steel			
	Color	Black			
Size / Weight	Height	357.3 mm / 14.07 inches			
	Width	705 mm / 27.76 inches			
	Depth	456.6 mm / 17.98 inches			
	Weight	23.8 kg / 52.47 lbs			
Rigging / Mounting	<b>ACCESSORIES</b>				
	<b>FLOOR STANDS</b>				
	13360109	AC PRO-FS	Black	EAN 8024530006471	
	<b>POLE MOUNT KITS</b>				
	13360232	AC PMX		EAN 8024530010058	
	13360110	AC PRO-PM	Black	EAN 8024530006488	
	13360067	PM-KIT M20	Black	EAN 8024530014599	
	Protections	<b>BAGS, COVERS, RAIN PROTECTIONS</b>			
		13360611	CVR 010	Black	EAN 8024530020941
	Cables	<b>RAIN PROTECTIONS</b>			
		13360700	RPR60700	Black - RAL 9005	EAN 8024530023072
		<b>CABLES KIT</b>			
13360102	AC XLR 3M3F		EAN 8024530006402		