



# PMR 60T

TWO-WAY PENDANT MONITOR SPEAKER



## Description

PMR 60T is a two-way pendant monitor speaker, suitable for a wide range of applications. Thanks to its elegant and discreet design and refined finishes, it is suitable for all environmental and architectural conditions. Featuring a 6.5" woofer and 80 W RMS power, it is also equipped with a transformer for connection to constant voltage lines (70/100 V). The high quality of its transducers (arranged in a coaxial configuration) guarantees faithful and precise musical reproduction throughout the audio spectrum and allows to reach truly remarkable sound pressure levels for such compact products. The connection is simple and safe thanks to the removable four-pole screw terminals. The front grille is fixed by magnets and can therefore be easily removed to access the power rotary switch.

## Features

- › 80W RMS power handling
- › 114 dB max SPL
- › 70 ÷ 20000 Hz frequency range
- › 130° constant directivity conical coverage angle
- › 6.5" high power woofer
- › 1" neodymium dome tweeter
- › Self extinguishing plastic body
- › Steel magnetic front grille
- › 4 pole EUROBLOCK connector (audio input and parallel link output)
- › 5 m hanging cable included

## Part Number

13100098 PMR 60T W  
13100100 PMR 60T B


White - RAL 9003 EAN 8024530020606  
Black - RAL 9005 EAN 8024530020590



# PMR 60T

## TWO-WAY PENDANT MONITOR SPEAKER

Line Art 2D

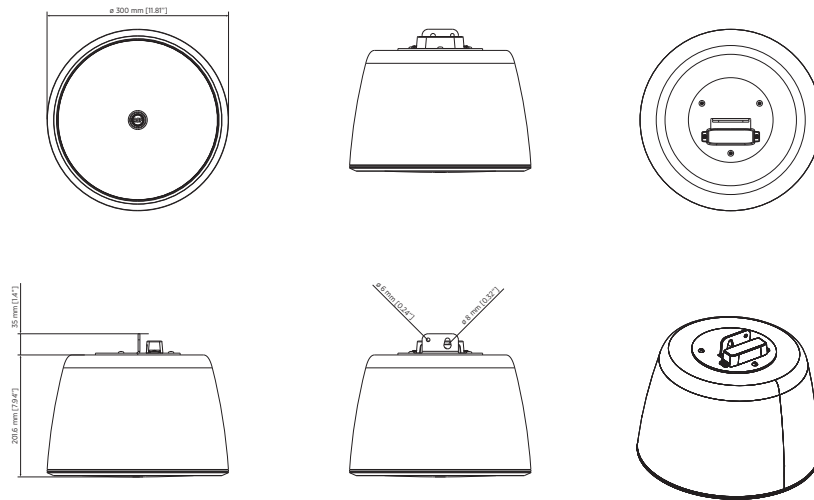

### TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response (-10dB)	70 Hz - 20000 Hz	
	Max SPL @ 1m	114 dB	
	Coverage angle	130°	
	System Sensitivity	89 dB	
<b>Power section</b>	Amplification	Full Range	
	Nominal Impedance	8 ohm	
	Power Handling	80 W RMS	
	Peak Power Handling	320 W PEAK	
	Protections	Bulb lamp	
	Crossover Frequencies	2500 Hz	
<b>Transducers</b>	Dome Tweeter	1 x 1.0" neo, 1.0" v.c	
	Woofer	1 x 6.5", 1.2" v.c	
<b>Input/Output section</b>	Input connectors	Euroblock	
	Output connectors	Euroblock	
	Constant Voltage Transformer	70/100 V	
	Power selection 1	80 W - 125 ohm	
	Power selection 2	40 W - 250 ohm	
	Power selection 3	20 W - 500 ohm	
<b>Standard compliance</b>	Power selection 4	10 W - 1000 ohm	
	Power selection 5	5 W - 2000 ohm	
	Safety agency	CE compliant	
	<b>Physical specifications</b>	Cabinet/Case Material	ABS
		Grille	Steel
Color		White - RAL 9003, Black - RAL 9005	



# PMR 60T

## TWO-WAY PENDANT MONITOR SPEAKER

Size / Weight	Height	236 mm / 9.29 inches
	Diameter	300 mm / 11.81 inches
	Weight	5.1 kg / 11.24 lbs