TT 808-AS

PROFESSIONAL ACTIVE SUBWOOFER

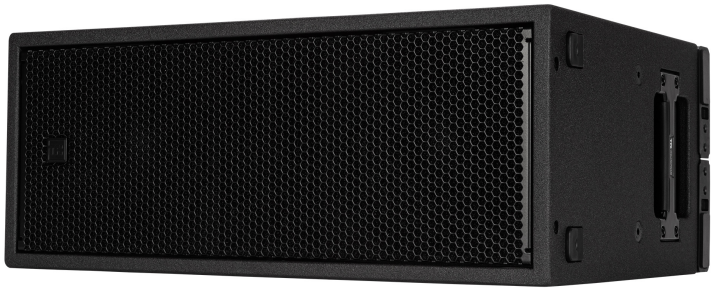

Description

TT 808-AS is a compact low-profile high-performance active subwoofer. It features two vented-loaded 8" cone woofers powered by a 1000 Watts two-channel amplifier -one for each woofer- on a baltic birch plywood cabinet painted with black polyurea and weatherproof treatment. Management and tuning are available via RDNet software or using the two preset buttons, a polarity button, and a variable delay accessible from the back panel. The cabinet features rubber feet on two sides and two threaded pole-mounts for horizontal and vertical placement. Two stabilizing brackets make the vertical placement stable and firm. TT 808-AS can be used stand-alone, in subwoofer arrays, or as the low-frequency complement for TT 515-A speaker.

Features

› 129 dB max SPL
› 40 Hz to 400 Hz frequency range
› 1000 W RMS Class-D Amplifier
› 2 x 8" neodymium woofers, 2.5" v.c
› RDNet on board
› Bass Motion Control excursion management
› Flexible Rigging
› Rotatable TT+ Logo

Part Number

13000693	TT 808-AS	220-240 V	Black	EAN 8024530019532
13000731	TT 808-AS	115 V	Black	EAN 8024530019600

Products are continually improved. All specifications are therefore subject to change without notice.

TT 808-AS

PROFESSIONAL ACTIVE SUBWOOFER

Line Art 2D

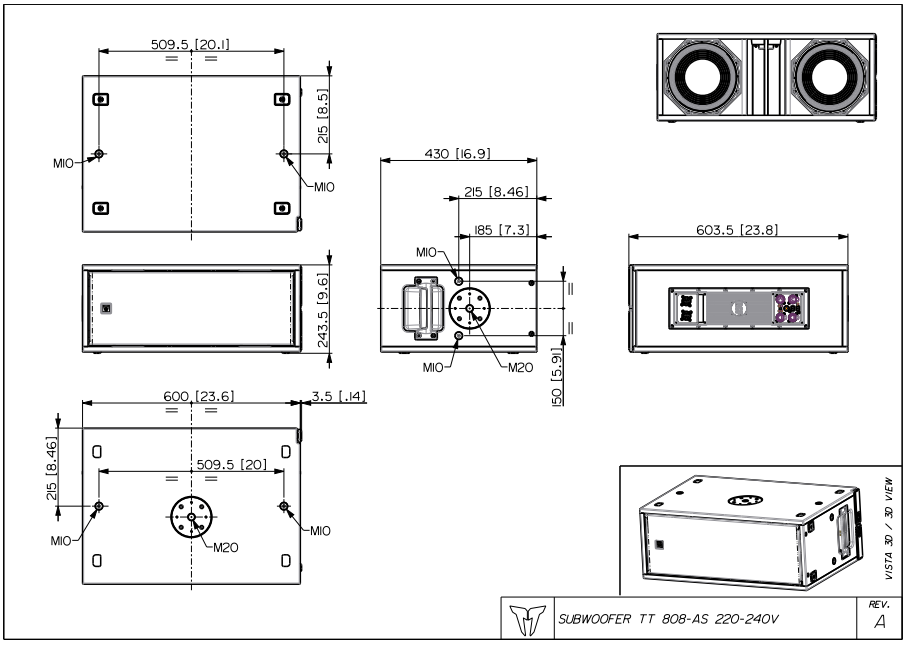

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	40 Hz - 400 Hz
	Max SPL @ 1m	129 dB
Transducers	Woofer	2 x 8'' neo, 2.5'' v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Gain, Equalization, ByPass on board
	RDNet	Onboard
Power section	Total Power	2000 W Peak, 1000 W RMS
	Low frequencies	2000 W Peak, 1000 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	2X M20 TOP AND SIDE 8X M10 2X SIDE
	Handles	1 X SIDE
	Grille	Steel
	Color	Black

TT 808-AS

PROFESSIONAL ACTIVE SUBWOOFER

Size / Weight	Height			243.5 mm / 9.59 inches
	Width			603.5 mm / 23.76 inches
	Depth			430 mm / 16.93 inches
	Weight			20 kg / 44.09 lbs
	ACCESSORIES			
Rigging / Mounting	**HORIZONTAL BRACKETS**			
	13360709	HBR60709	Black	EAN 8024530023058
	POLE MOUNT KITS			
	13360232	AC PMX		EAN 8024530010058
	13360067	PM-KIT M20	Black	EAN 8024530014599
	VERTICAL BRACKETS			
	13360500	V-BR TT 808	Black	EAN 8024530019792
Protections	**RAIN PROTECTIONS**			
	13360689	RPR60689	Black	EAN 8024530022914
Cables	**CABLES KIT**			
	13360102	AC XLR 3M3F		EAN 8024530006402