



# SUB 15-AS

PROFESSIONAL ACTIVE SUBWOOFER




<b>Description</b>	<p>The SUB 15-AS is a portable 15" high-power active subwoofer for live sound applications. It features a state-of-the-art transducer and a powerful 2200 Watts Class-D amplifier that delivers sound pressure levels up to 133 dB with exceptional headroom. Designed as the ideal complement for 8", 10" and 12" loudspeakers, it includes Bass Motion Control algorithm for extended bass response at any volume. The connection panel features mono/stereo Combo inputs, an XLR stereo link, and XLR crossover outputs. Rear panel controls include volume, polarity, and low-pass frequency selection. The rugged all-wood cabinet with scratch-resistant polyurea coating makes it durable, easy to carry and install securely. With its versatility, sound quality, and high power output, the SUB 15-AS is perfect for small to mid-sized venues and portable applications.</p>								
<b>Features</b>	<ul style="list-style-type: none"><li>› 2200Watt</li><li>› 133 dB max SPL</li><li>› 35Hz - 400Hz frequency response</li><li>› 15" Woofer, 3.0" voice coil</li><li>› Birch tour grade cabinet with polyurea coating</li><li>› Mono/Stereo XLR/TRS combo In + Link, Stereo XLR Xover Out</li><li>› Volume, polarity, and lowpass frequency selection</li></ul>								
<b>Part Number</b>	<table><tr><td>13000938 SUB 15-AS</td><td>220-240 V</td><td>Black</td><td>EAN 8024530023980</td></tr><tr><td>13000939 SUB 15-AS</td><td>100-120 V</td><td>Black</td><td>EAN 8024530024239</td></tr></table>	13000938 SUB 15-AS	220-240 V	Black	EAN 8024530023980	13000939 SUB 15-AS	100-120 V	Black	EAN 8024530024239
13000938 SUB 15-AS	220-240 V	Black	EAN 8024530023980						
13000939 SUB 15-AS	100-120 V	Black	EAN 8024530024239						



# SUB 15-AS

PROFESSIONAL ACTIVE SUBWOOFER

Line Art 2D

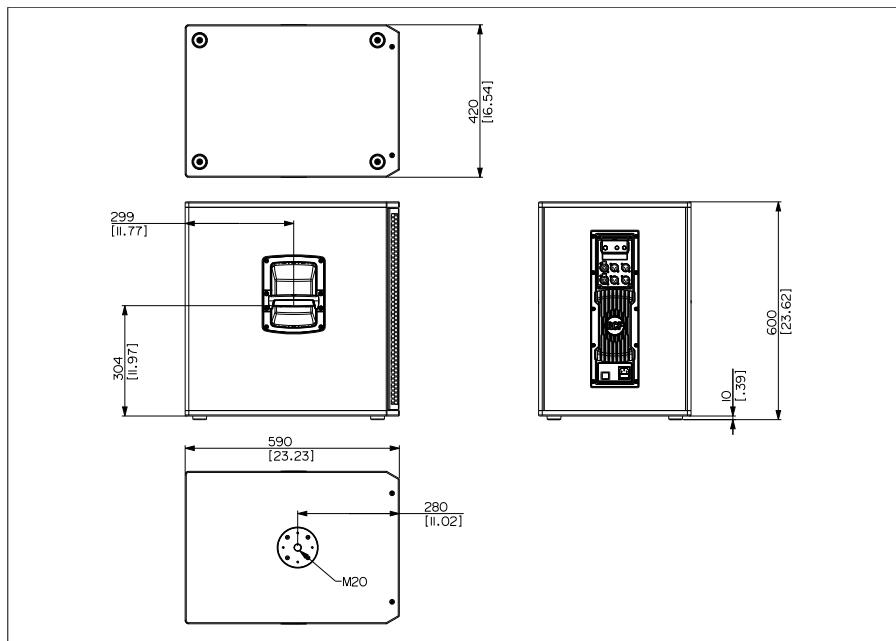

## TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	35 Hz - 400 Hz
	Max SPL @ 1m	133 dB
<b>Transducers</b>	Woofer	1 x 15", 3.0" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
<b>Processor section</b>	Protections	Thermal
	Limiter	Soft Limiter
	Controls	Volume, Polarity, Low pass filter frequency
<b>Power section</b>	Total Power	2200 W Peak
	Cooling	Convection
	Connections	VDE
<b>Standard compliance</b>	Safety agency	CE compliant
<b>Physical specifications</b>	Cabinet/Case Material	Baltic birch plywood
	Handles	1 each side
	Pole mount/Cap	M20 thread
	Grille	Steel with clothing
	Color	Black
<b>Size / Weight</b>	Height	590 mm / 23.23 inches
	Width	420 mm / 16.54 inches
	Depth	590 mm / 23.23 inches
	Weight	30 kg / 66.14 lbs



# SUB 15-AS

PROFESSIONAL ACTIVE SUBWOOFER

Rigging / Mounting

## ACCESSORIES

### POLE MOUNT KITS

13360067 PM-KIT M20 Black EAN 8024530014599

Protections

### BAGS, COVERS

13360529 CVR 004 Black EAN 8024530020415