


SS-9001

SPEAKER SELECTOR

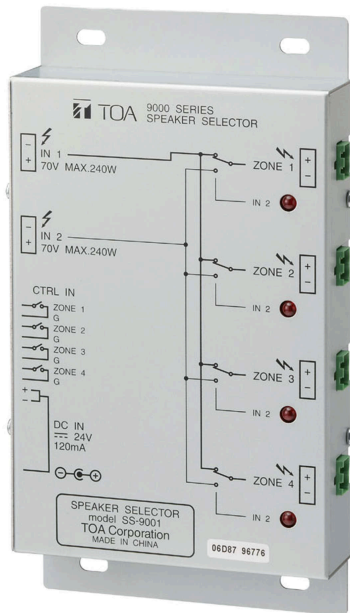

The SS-9001 is a speaker selector used in conjunction with the 9000 series mixer/amplifier. It outputs 2 input signals to 4 different zones.


Key features

- Up to 4 speaker lines switchable
- 2 amplifier inputs for announcements and BGM
- Interconnectable to other TOA systems

Specifications

Power Source	Supplied from the optional AD-246 AC adapter or an external 24 V DC/200 mA power supply.
Current Consumption	120 mA
Control Signal	No-voltage make contact input (polarized), open voltage: 24 V DC, short-circuit current: 3 mA
Control Power	240 W or less (70 V/100 V line)
Speaker Terminal	Removable terminal block (2 pins)
Control Terminal	Removable terminal block (10 pins)
Operating Temperature	-10 °C to +40 °C
Finish	Case: Surface-treated steel plate
Dimensions	112 (W) x 197 (H) x 30 (D) mm
Weight	530 g
Included Accessories	Removable terminal plug (2 pins) x 6, Removable terminal plug (10 pins) x 1, Cord clamp x 1, Mounting screw x 4
Optional Accessories	AC adapter: AD-246

Dimensions

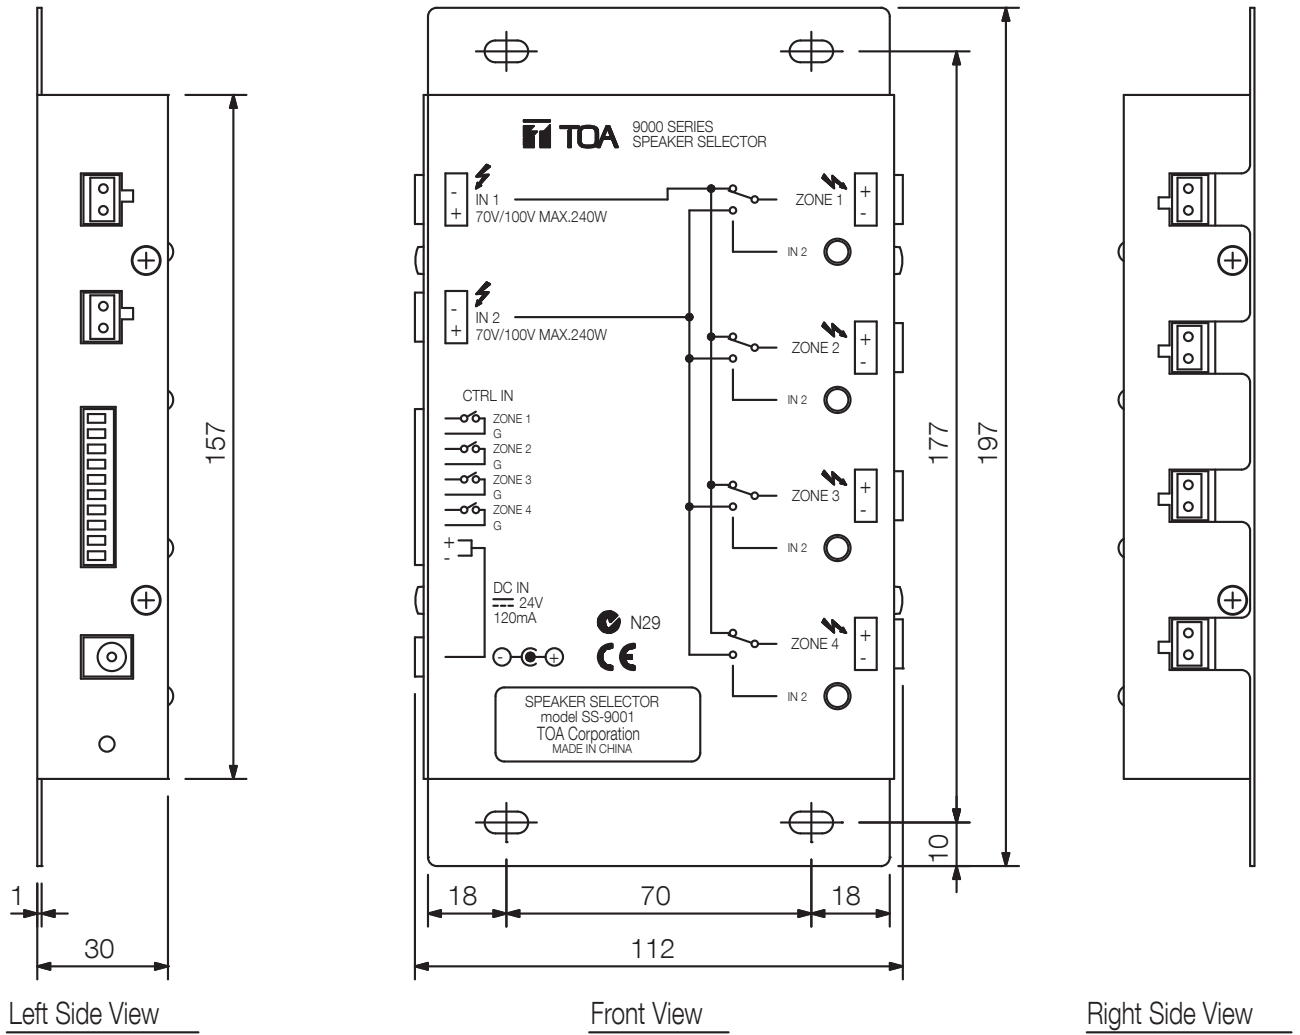

UNIT:mm SCALE:1/2