


The BS-634 can be installed easily on the wall with help of the plug-in speaker receptacle.

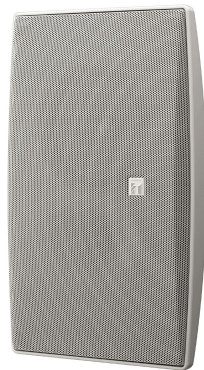

Order no: BS-634

### Specifications

Frequency response	120 Hz - 18 kHz
Connection	M4 screw terminal, distance between barriers: 11 mm
Sensitivity (1#V, 1#m) (combined)	90 dB
Speaker component	12 cm cone-type
Rated input	6 W
Tappings	6 / 3 W (100 V), 3 / 1.5 W (70 V)
Rated impedance	100 V, 70 V
Dimensions (W x H x D)	210 x 330 x 80 mm
Dimensions (ø x D)	x 80 mm
Finish	HIPS resin, off-white (RAL 9010 or equivalent)

Appearance

