

A unidirectional microphone with a gooseneck shaft. Use this microphone in conjunction with the ST-73A desk-top stand (option).




Article number:DM-524S  
Alternative products: EM-800, DM-524B

### Specifications

|                          |                              |
|--------------------------|------------------------------|
| Frequency response       | 100 Hz - 10 kHz              |
| Connection               | 3-pin plug BTS21P3B          |
| Rated impedance          | 600 $\Omega$                 |
| Microphone type          | Dynamic microphone           |
| Directivity              | Cardioid                     |
| Sensitivity              | -55 dB (1 kHz 0 dB = 1 V/Pa) |
| Dimensions (W x H x D)   | x 557                        |
| Dimensions ( $\phi$ x D) | 41 x 557 mm                  |
| Finish                   | paint, gold,                 |

## Appearance

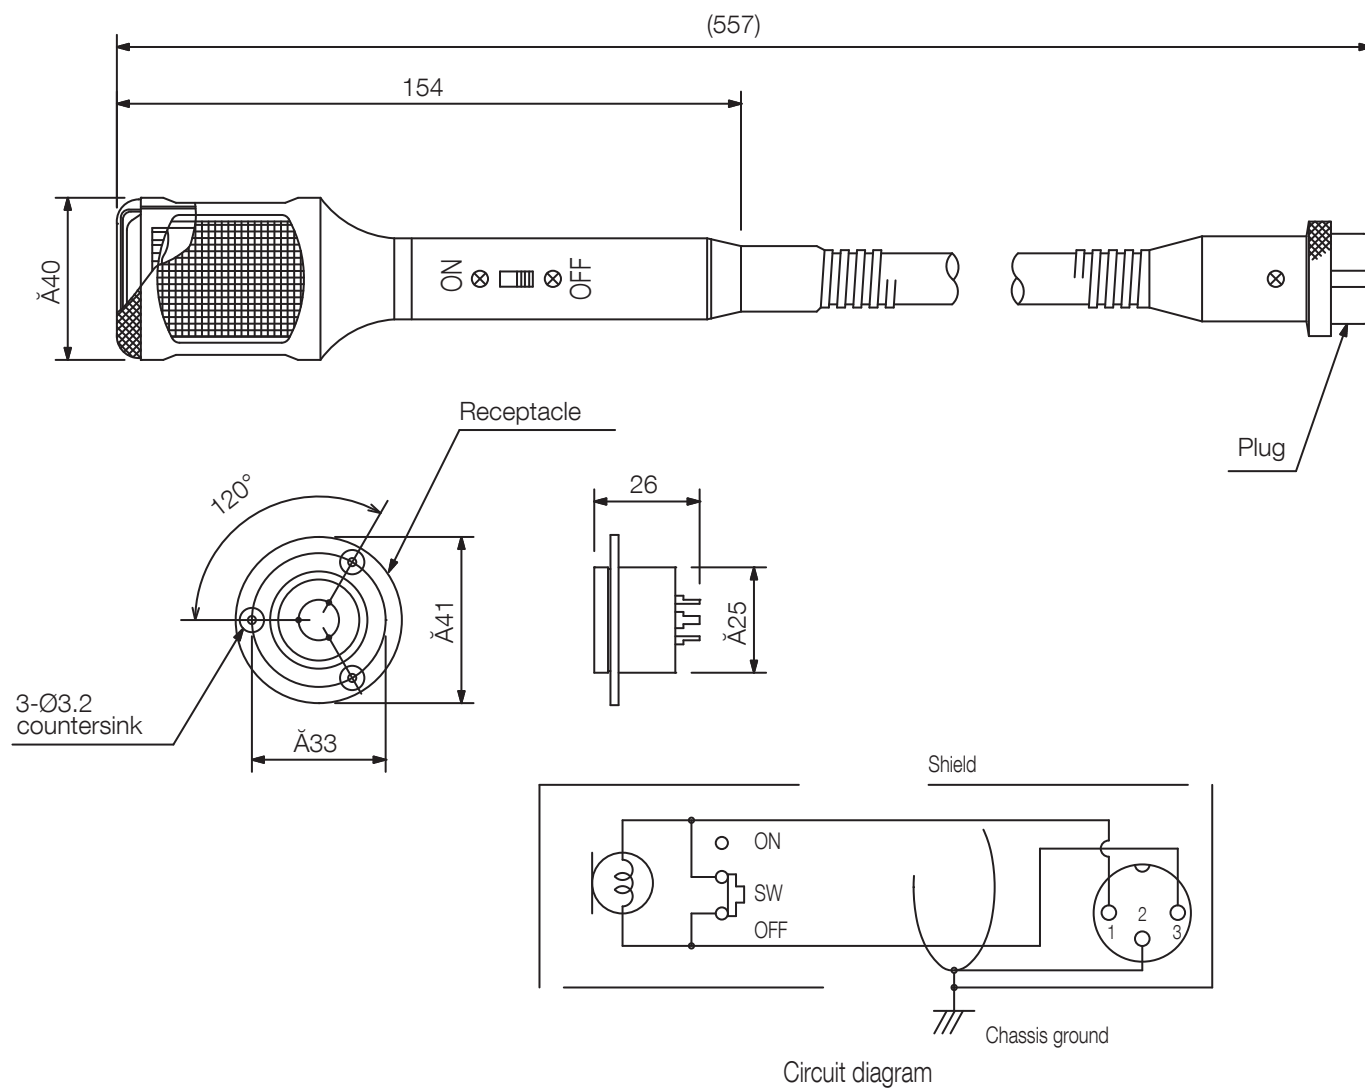

UNIT:mm

SCALE:1/2

Note: Numerical values in parentheses are for reference only.