

The TU-651M is a highly intelligible driver unit suited to public address announcement applications. Use the driver unit in combination with a suitable horn (optional). Its powder-coated finish and stainless steel screws ensure the unit's weatherproof capability.




Order no: TU-651M

Specifications

Frequency response	150 Hz - 6 kHz
Sensitivity (1#V, 1#m)	110 dB (with TH-650, TH-660)
Rated input (High Impedance)	50 W
Tappings	100V LINE: 200Ω (50W), 330Ω (30W), 670Ω (15W) 70V LINE: 100Ω (50W), 200Ω (25W), 330Ω (15W), 670Ω (7.5W)
Finish	

Appearance

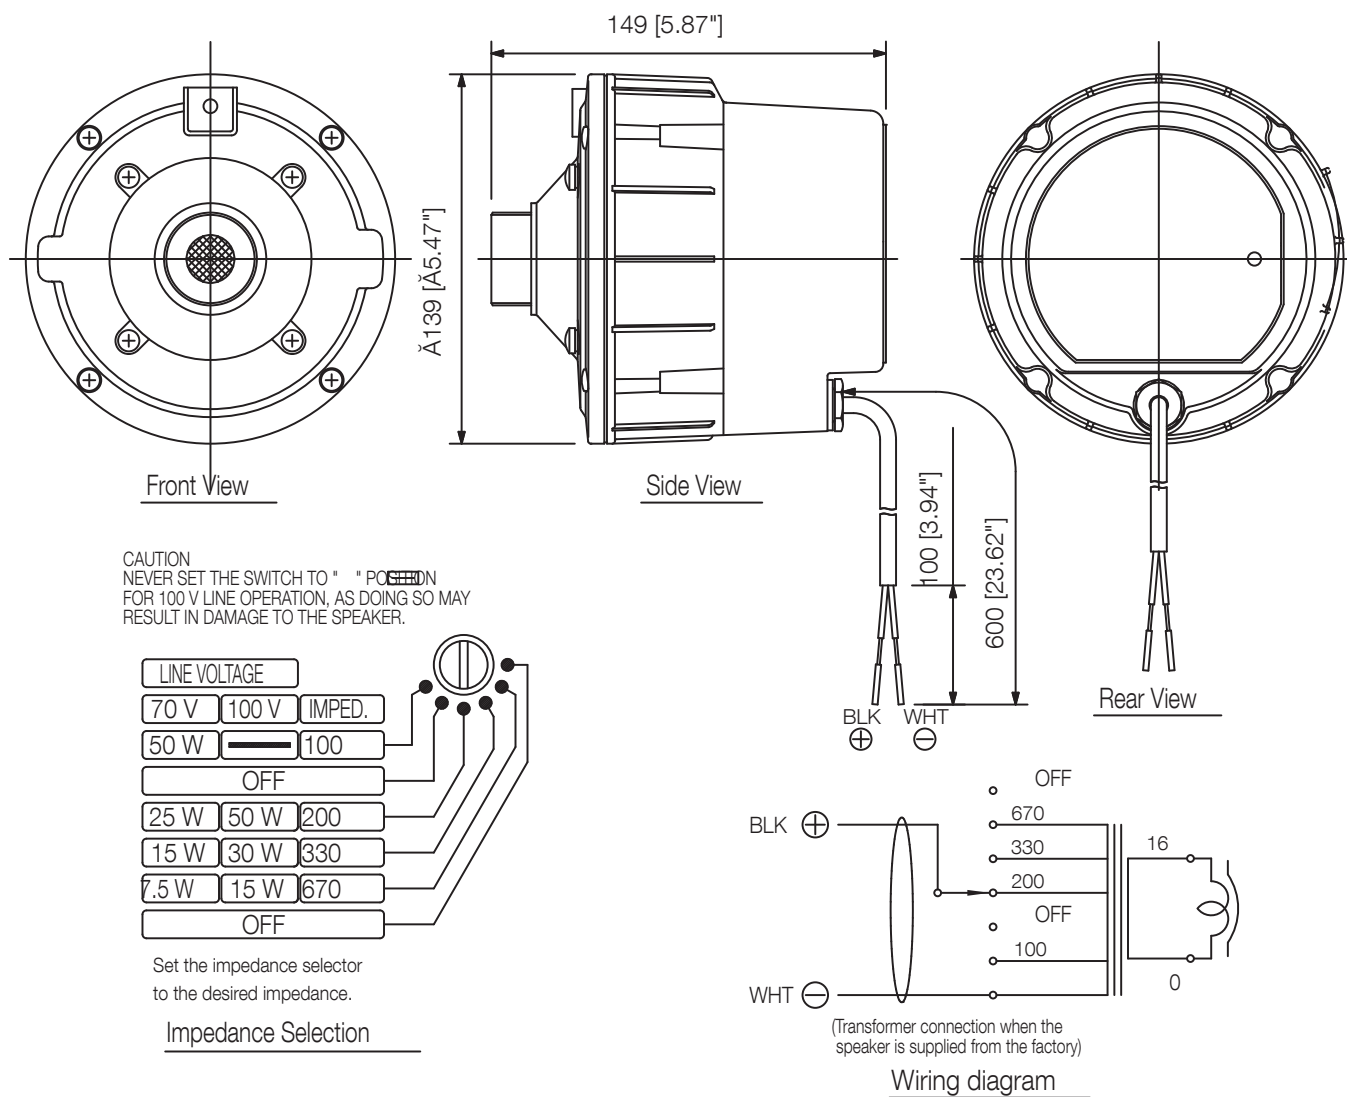

UNIT:mm

SCALE:1/3