



# DMA 162

TWO CHANNELS MATRIX AMPLIFIER



## Description

DMA 162 is a two-channel class-D matrix amplifiers equipped with a powerful DSP platform, allowing managing inputs and outputs in terms of routing and equalization (a complete set of processing functions is available, including PEQ, FIR filters, bass enhancement, limiters, compressors and environmental equalization); moreover, dedicated presets for RCF speakers have been implemented to optimize their acoustic performance. It can distribute 4 audio channels to DMA 162P units through an analogue audio BUS, combining a flexible and scalable multi-room architecture with an easy connection and installation. Its configuration is simple and user friendly and can be carried out through either its front panel controls (with OLED display) or RDNet. Thanks to its installation flexibility, accurate design, and robustness, it is ideal for a wide range of business music and installed sound applications.

## Features

- › 2 x 160 W Class-D power amplifier
- › 20 ÷ 20000 Hz frequency range
- › Full on-board processing
- › RCF speakers' presets
- › Proprietary bass enhancer algorithm
- › FIRPHASE linear phase filters
- › Flexible and scalable multi-room architecture
- › Suitable for desktop or rack installation
- › RDNet ready for networked management
- › Remote controls and paging console accessories

## Part Number

12100027	DMA 162 EU	EU	90-240 V	Black	EAN 8024530017156
12100041	DMA 162 US	US	90-240 V	Black	EAN 8024530018412
12100044	DMA 162 UK	UK	90-240 V	Black	EAN 8024530018443



# DMA 162


TWO CHANNELS MATRIX AMPLIFIER

Line Art 2D



# DMA 162

## TWO CHANNELS MATRIX AMPLIFIER

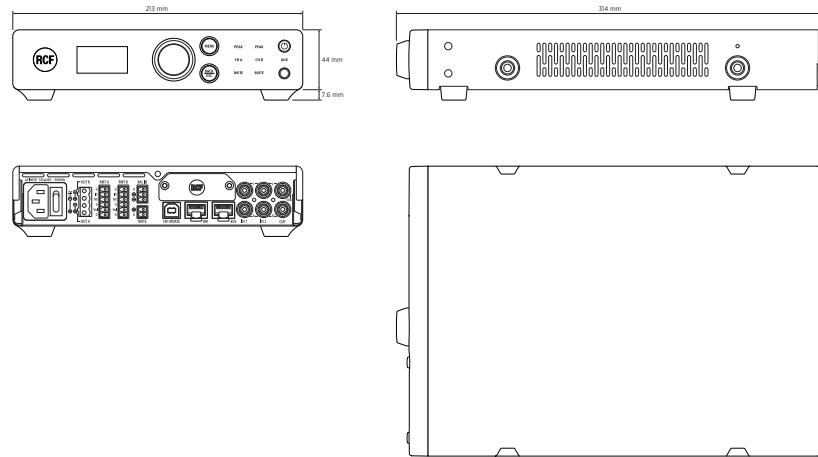

### TECHNICAL SPECIFICATIONS

#### Amplifier specifications

Amplifier Class	D
Output Power (RMS all channels driven)	2 x 160 W @ 4 ohm 2 x 160 W @ 8 ohm 1 x 320 W @ 4 ohm (bridge) 1 x 320 W @ 8 ohm (bridge)
Output power @ 70 V	1 x 320 W @ 70 V
Frequency Response (-3dB)	20 Hz - 20000 Hz
Distortion (THD+N) @ 1 kHz nominal power	<0.01 %

#### Input section

Total number of inputs	5
Balanced	2
Unbalanced	3
Mono	2
Stereo	3
VOX	Yes
Line inputs	3
Mic+Line inputs	1
VOX	Yes
Paging inputs	1
Paging command	Contact
General Purpose Inputs (GPI)	1

#### Output section

Signal output number	1
Signal output connectors	RCA
Power output connectors	Euroblock



# DMA 162

## TWO CHANNELS MATRIX AMPLIFIER

<b>Processing</b>	DSP	Yes
	EQ Filters	Yes
	FIR	Yes
	Compressors	Yes
	Tone controls	Yes
	High-pass filter	80 Hz - 200 Hz
<b>Configuration and control</b>	RCF speakers presets	Yes
<b>Protections</b>	Cooling	Forced
	Short circuit	Yes
	Thermal	Yes
	DC	Yes
	Fuses	Yes
	VHF (Very High Frequencies)	Yes
<b>Power requirement</b>	Operating voltage	90-240 V~ 50/60Hz
	Power consumption	400 W
<b>Standard compliance</b>	Safety agency	CE compliant, UL 62368-1
<b>Physical specifications</b>	Cabinet/Case Material	Metal
	Color	Black
	Rack mounting	1/2 19", 1U , Optional rack mounting accessory required
<b>Size / Weight</b>	Height	44 mm / 1.73 inches
	Width	213 mm / 8.39 inches
	Depth	314 mm / 12.36 inches
	Weight	1.7 kg / 3.75 lbs

### ACCESSORIES

#### Electronics

##### BOARDS

12399065	BT BOARD DMA	Black - RAL 9005	EAN 8024530018788
12399048	RDNET BOARD DMA	Black	EAN 8024530017750

##### DESKTOP MICROPHONE

14322031	BM 404	Black - RAL 9005	EAN 8024530017903
----------	--------	------------------	-------------------

##### TRANSFORMERS

12399069	TRF-KIT DMA 162	Black	EAN 8024530020835
----------	-----------------	-------	-------------------

##### WALL MOUNT REMOTE CONTROLS

12399051	RC 401 EU	Black - RAL 9005	EAN 8024530017217
12399052	RC 401 EU	White - RAL 9003	EAN 8024530017224
12399053	RC 401 US	Black - RAL 9005	EAN 8024530017231
12399054	RC 401 US	White - RAL 9003	EAN 8024530017248

#### Rack Components

##### RACK MOUNT KITS

17360039	AR 1050	Grey	EAN 8024530016180
13360426	RM-KIT DMA	Black - RAL 9005	EAN 8024530017415