



BM 3003

3 ZONE PAGING MICROPHONE



Description The BM 3003 paging microphone allows to make selective calls to 3 zones and is the ideal complement of the RCF ES 3323 mixer amplifier (with tuner and CD/USB-MP3 player inside).
The inputs 2 and 3 of the RCF ES 3323 amplifier have a RJ 45 port (each) to connect a BM 3003 paging microphone quickly and directly (through CAT 5 cable) or a line made of max.12 BM 3003 paging microphones by using 1 or more additional power supply units.

- Features**
- › Plastic body with 300 mm gooseneck
 - › PTT button with LED, Zone buttons with LED
 - › Power supplied by 'Phantom' (18 ÷ 48 V dc) for the BM 3003 directly connect to the ES 3323
 - › It can be directly connected to ES 3323 amplifiers
 - › External power supply AC AD2405 to be used on all BM 3003 connect to other BM 3003
 - › Lines of max. 12 BM 3003 paging microphones
 - › Polyurethane foam wind screen
 - › 5 m connecting cable (with RJ 45 plugs) included


Part Number 14322012 BM 3003 Grey EAN 8024530006617



BM 3003

3 ZONE PAGING MICROPHONE

Line Art 2D

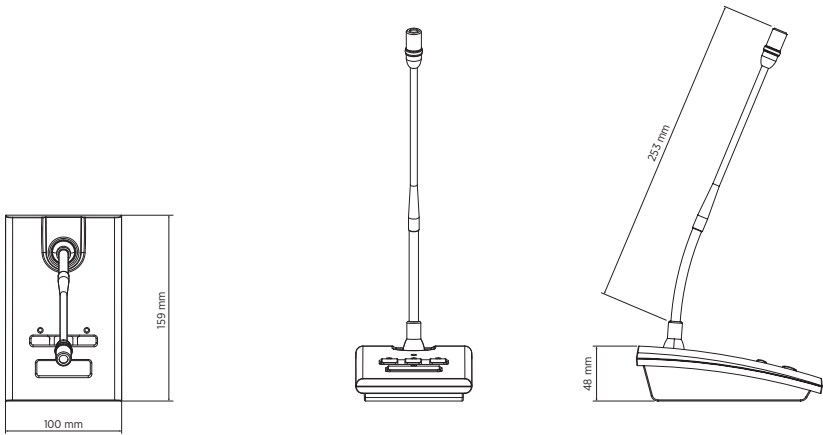

TECHNICAL SPECIFICATIONS

Microphone specifications	Type	Desktop paging microphone with electret capsule
	Directivity	Cardioid
	Sensitivity	-65 dB
	Frequency Response (-3dB)	50 Hz - 18 kHz
	Minimum load impedance (ohm)	470.00 ohm
	Nominal output voltage @3.3 kohm (mV RMS)	100.00 mV RMS
Console specifications	Console Type	Paging
	General call	Yes
	Selective call	Yes
	Number of zones	3
	LED indicators	Yes
Power requirement	Power consumption	2.80 mA
Connections	Connectors	RJ45
Functionalities	Smart PTT	Yes
Accessories	Cable included	Yes
	Cable length (m)	5
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plastic
	Color	Grey



BM 3003

3 ZONE PAGING MICROPHONE

Size / Weight	Height	48 mm / 1.89 inches
	Width	100 mm / 3.94 inches
	Depth	159 mm / 6.26 inches
	Weight	0.73 kg / 1.61 lbs