



DM 41

TWO-WAY COMPACT SPEAKER



Description DM 41 is a compact two way speaker designed for constant voltage systems. The speaker provide natural, smooth sound reproduction ideal for use in business music systems and indoor/outdoor background music applications. Connections to the loudspeaker line are made by using the two wire cable coming out from the loudspeaker rear side. The enclosure includes a protective perforated grille and an accessory for the wall mounting.

- Features**
- › 3.5" woofer with 1" dome tweeter
 - › Power selectable (100 V): 15 W – 7.5 W – 5 W – 2.5 W – 1.25 W
 - › 87 dB sensitivity
 - › Colour white RAL 9002 and black RAL 9005
 - › Plastic body UL 94 V0, steel grille
 - › Protection grade IP 55


Part Number	13000049 DM 41	8ohm	White - RAL 9002	EAN 8024530004941
	13000387 DM 41 B	8ohm	Black - RAL 9005	EAN 8024530010348



DM 41

TWO-WAY COMPACT SPEAKER

Line Art 2D

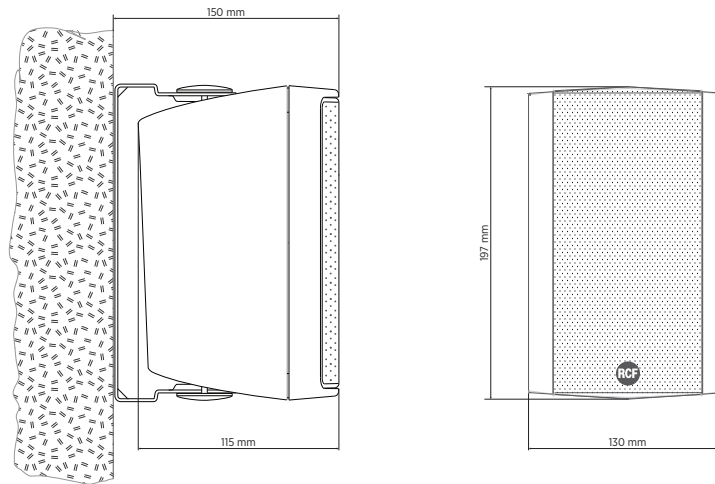

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	100 Hz - 20000 Hz
	Max SPL @ 1m	102 dB
	Horizontal coverage angle	180°
	Vertical coverage angle	170°
	System Sensitivity	87 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	15 W
	Peak Power Handling	60 W PEAK
	Crossover Frequencies	2.5 Hz
Transducers	Dome Tweeter	1 x 1.0"
	Woofers	1 x 3.5"
Input/Output section	Input connectors	Cable
	Output connectors	Cable
	Constant Voltage Transformer	100 V
	Power selection 1	15 W - 667 ohm
	Power selection 2	7.5 W - 1333 ohm
	Power selection 3	5 W - 2000 ohm
Standard compliance	Power selection 4	2.5 W - 4000 ohm
	Power selection 5	1.25 W - 8000 ohm
	IP protection grade	IP 55
	Safety agency	CE compliant



DM 41

TWO-WAY COMPACT SPEAKER

Physical specifications	Cabinet/Case Material	Plastic
	Hardware	Aluminium U bracket
	Grille	Aluminium
	Color	White - RAL 9002, Black - RAL 9005
Size / Weight	Height	197 mm / 7.76 inches
	Width	130 mm / 5.12 inches
	Depth	115 mm / 4.53 inches
	Weight	1.7 kg / 3.75 lbs