



GS 60

GARDEN SPEAKER



Description

GS 60 is an outdoor speaker suitable for gardens that includes a 5" coaxial loudspeaker and an internal transformer for 100V / 70V constant voltage lines. GS 60 can be placed on several surfaces, such as wood, concrete or into the ground.

Features

- › Body made of linear low-density polyethylene
- › Coaxial transducer with 5,25" woofer and 1,20" tweeter
- › Suitable for installation on different surfaces
- › Can be used in constant voltage lines 100V / 70V or in low impedance (8 ohm)
- › Protection grade IP56

Part Number

13133084 GS 60

Green


EAN 8024530012090



GS 60

GARDEN SPEAKER

Line Art 2D

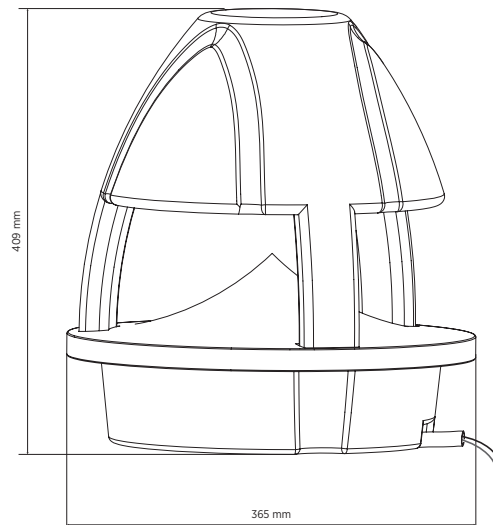

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	60 Hz - 20000 Hz
	Max SPL @ 1m	111 dB
	System Sensitivity	90 dB
Power section	Nominal Impedance	8 ohm
	Power Handling	60 W
	Peak Power Handling	240 W PEAK
Transducers	Dome Tweeter	1 x 1.3"
	Woofer	1 x 5.5"
Input/Output section	Constant Voltage Transformer	70/100 V
	Power selection 1	32 W - 313 ohm
	Power selection 2	16 W - 625 ohm
	Power selection 3	8 W - 1250 ohm
	Power selection 4	4 W - 2500 ohm
	Power selection 5	2 W - 5000 ohm
Standard compliance	Power selection 6 (100 V)	1 W - 10000 ohm
	IP protection grade	IP 56
Physical specifications	Safety agency	CE compliant
	Cabinet/Case Material	PE Low Density
Size / Weight	Color	Green
	Height	409 mm / 16.1 inches
	Diameter	365 mm / 14.37 inches